

## ICBDF484CG

### FEATURES

- Rigorously tested for decades of use
- Exceptional support from our Customer Care team
- Dual-stacked burners produce up to 16 MJ/h
- Continuous cast-iron grates for easy movement of pots and pans
- Cobalt blue porcelain interior
- Dual convection oven for faster, more consistent cooking
- Spark ignition system re-ignites if flame goes out
- Heavy-gauge stainless steel
- Exclusive pivoting control panel
- Red, black or stainless steel control knobs
- Temperature probe cooks to ideal doneness and lets you know when it's ready
- Self clean, delayed start, timed cook, Sabbath mode and more
- Burners capable of delivering less than 0.5 MJ for premier simmer performance
- 10 cooking modes make meals easy
- 4 dual-stacked burners plus 15 MJ/h chargrill and 15MJ/h teppanyaki

### ACCESSORIES

- Stainless steel, brass or chrome bezels
- 13 cm and 25 cm stainless steel risers, and 51 cm riser with shelf
- 76 cm baking sheet
- Hardwood cutting board


Accessories available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



### KNOB-OPTIONS



### TOP-CONFIGURATION

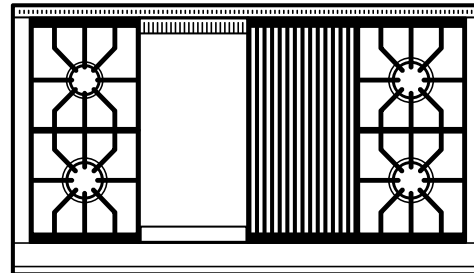


### RANGETOP-SPECIFICATIONS

- 1 - 9 MJ/h Burner
- 3 - 16 MJ/h Burner
- 1 - 15 MJ/h Teppanyaki
- 1 - 15 MJ/h Chargrill


**PRODUCT-SPECIFICATIONS**

|                            |                                  |
|----------------------------|----------------------------------|
| model                      | ICBDF484CG                       |
| dimensions                 | 1216mmW x 937mmH x 749mmD        |
| Oven 1 Interior Dimensions | 356mmW x 419mmH x 483mmD         |
| Oven 2 Interior Dimensions | 635mmW x 419mmH x 483mmD         |
| Oven 1 Overall Capacity    | 70 L                             |
| Oven 2 Overall Capacity    | 127 L                            |
| Door Clearance             | 749mm                            |
| weight                     | 311 kg                           |
| electrical-supply          | 220-240 VAC; 50/60 Hz            |
| electrical-service         | 35 amp                           |
| gas-inlet                  | Class B or Class D hose assembly |

**ELECTRICAL**




**GAS**




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

**DIMENSIONS**

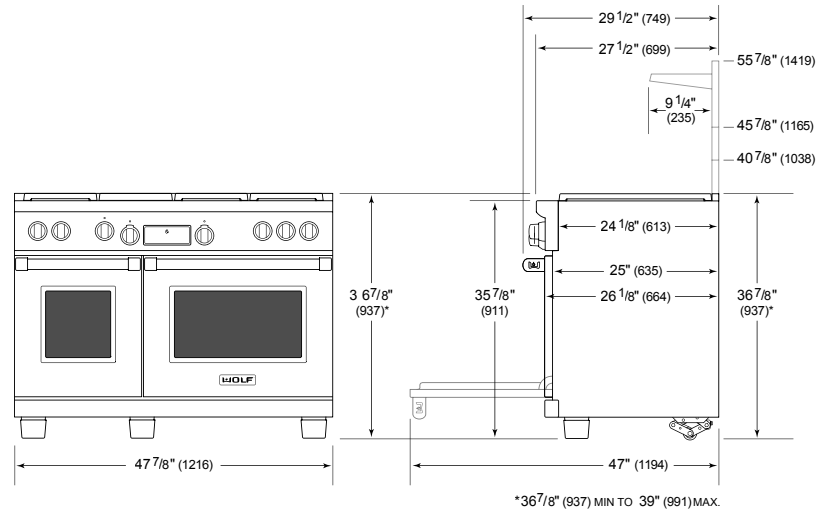

**STANDARD INSTALLATION**

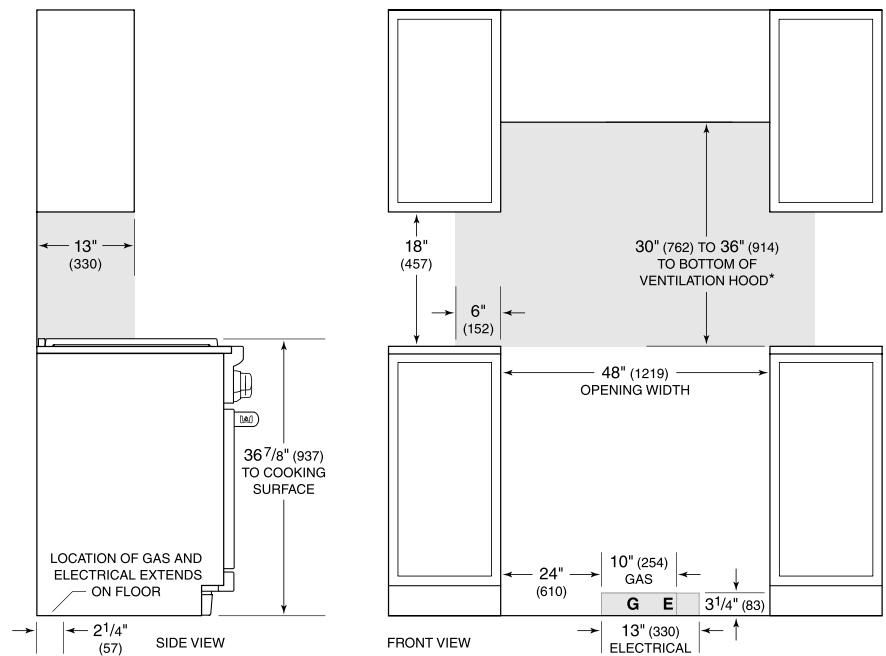

*\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for charbroiler.  
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.  
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.*